


ROLLERS
QUALITY, EFFICIENCY



RAZOL SUIRE
ENSEMBLE, CULTIVONS L'EXCELLENCE

**THE FRENCH AGRICULTURAL
ROLLERS SPECIALIST**

June 2026 edition

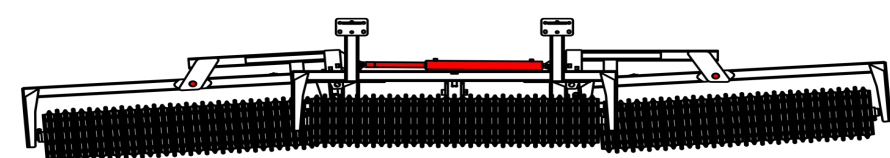

+ PENDULAR SYSTEM


Each side roller is mounted on a Ø50 mm pivot on the spreader support, allowing oscillation and following of the ground contour even under difficult conditions with a high degree of slope. A friction pad guide holds each component in place and protects the spreader support pivot from premature wear.

+ SAFETY

Standard LED signalling.

+ HITCHES

Fixed ring as standard.
Optional rotating ring and lifting arm category 3N to suit all types of tractors and use.

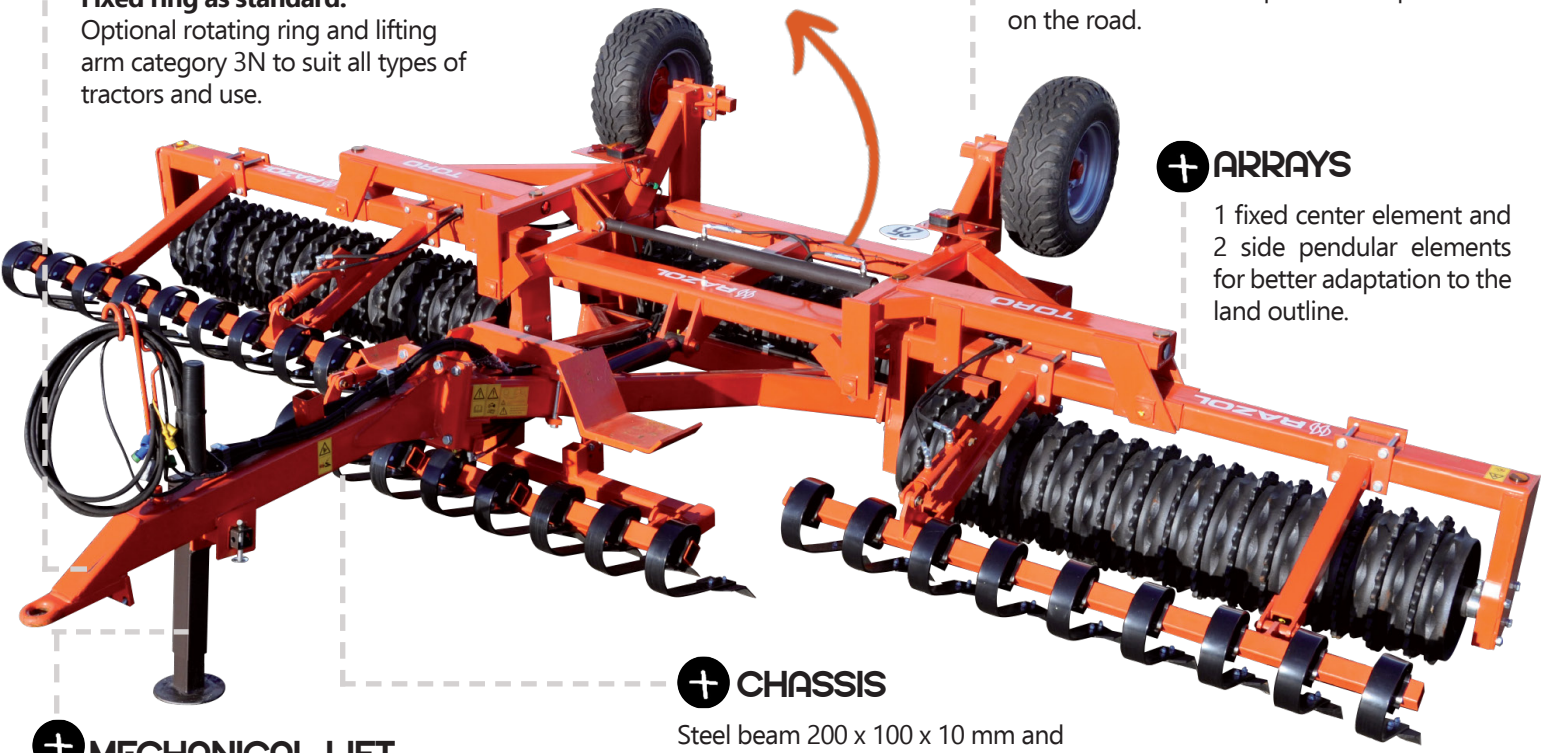

TORO RVH

+ WHEELS

400/60-15.5 as standard.
The wheels can be switched to 380/55 R16.5 for better confort for trips between plots and on the road.

+ ARRAYS


1 fixed center element and 2 side pendular elements for better adaptation to the land outline.

+ CHASSIS

Steel beam 200 x 100 x 10 mm and 150 x 100 x 8 mm for great sturdiness in difficult conditions.

+ MECHANICAL LIFT

As standard.
Hydraulic in option.

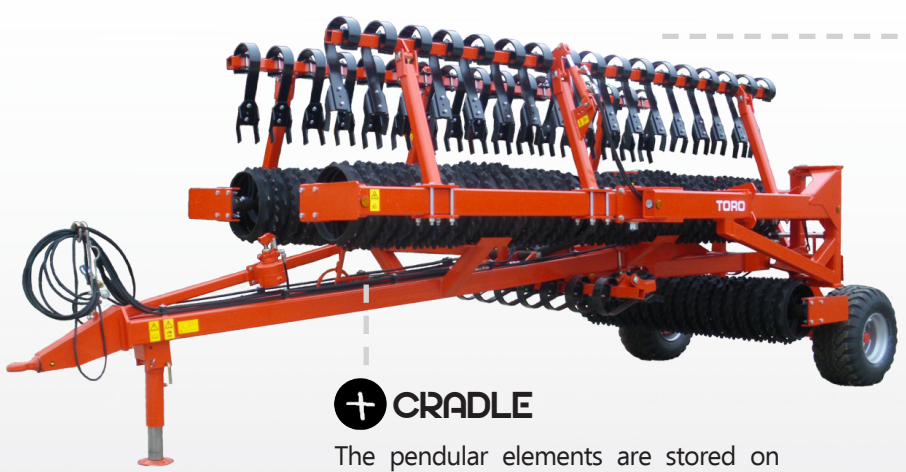

+ CRADLE

The pendular elements are stored on specially made cradle for transport safety.

+ TRANSPORT

The width is less than 2.55 m on the road, facilitating easy transport.
Lifting is achieved with a single double-acting hydraulic cylinder.
Folding* is accomplished with 1 double-acting hydraulic cylinder (*2 for models 9.20 to 10.20 m)

+ WHEELS


400/60-15.5 as standard.
The wheels can be switched to 380/55 R16.5 for better confort for trips between plots and on the road.

+ SAFETY

Standard LED signalling.

+ ARRAYS

1 fixed center element and 2 side pendular elements for better adaptation to the land outline.

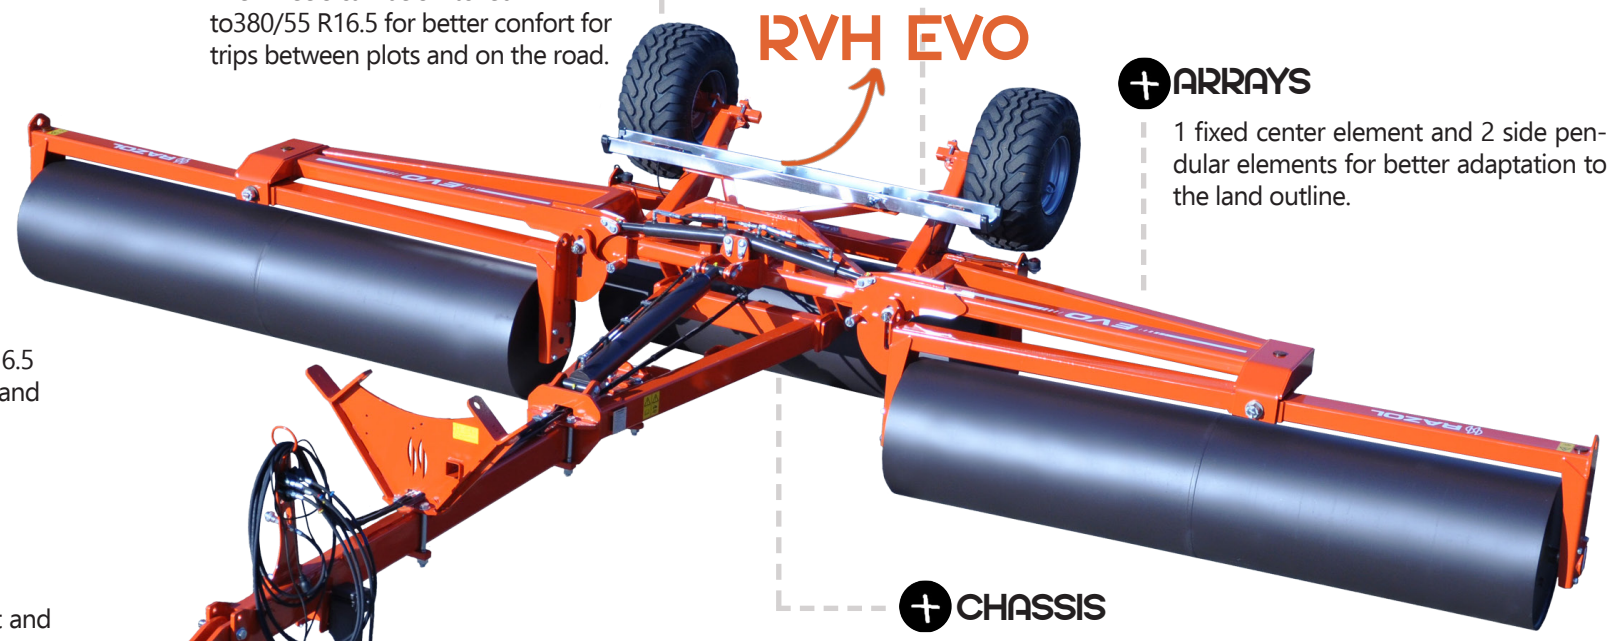

RVH EVO

+ CHASSIS

Steel beam 200 x 100 x 10 mm and 180 x 100 x 8 mm for great sturdiness in difficult conditions.
Reinforced frame on the RVH EVO 8.

+ HITCHES

Fixed ring as standard.
Optional rotating ring and lifting arm category 3N to suit all types of tractors and use.

+ CROSSING AXLE

Square of 60 mm.

+ WHEELS

100/75-15.3 as standard.
11.5/75-15.3 or 13.0/55-16 in option.




ROLLPACK

+ MECHANICAL LIFT

Or hydraulic with a hand pump in option.


+ ARRAYS

1 fixed middle element and 2 side elements to better suit the land's shape.
Adjustable rollers' tightening rings.

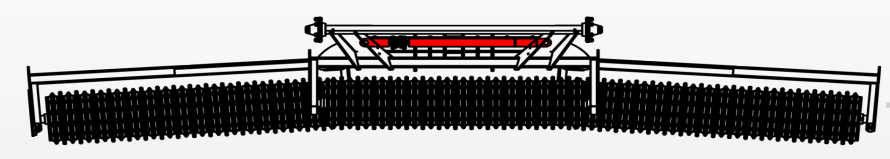

+ SPRINGFLEX SYSTEM

This system ensures constant tamping throughout the entire width, by means of a double compression spring located at the end of the rod of the lateral element folding cylinder. Suitable for ground profiles with a slight slope or gradient.





SPECIFICATIONS

ROLLPACK	RPK 5	RPK 6	RPK 7	RPK 8
Working width	5,25 m	6,25 m	7,25 m	8,25 m
Transport width	2,45 m	2,45 m	2,45 m	2,45 m

CAMBRIDGE Ø520 mm - Lifetime Guarantee*

CORRUGATED CAMBRIDGE Ø520 mm - **NEW** Cast Iron 2-year Guarantee or Lifetime Guarantee*

CORRUGATED Ø500 mm - Lifetime Guarantee*

TORO - RVH	RVH 6	RVH 7	RVH 8	RVH 9	RVH 9,5	RVH 10
Working width	6,20 m	7,20 m	8,20 m	9,20 m	9,50 m	10,20 m
Transport width	2,55 m	2,55 m	2,55 m	2,55 m	2,55 m	2,55 m

CAMBRIDGE Ø520 mm - Lifetime Guarantee*

CORRUGATED Ø500 mm - Lifetime Guarantee*

RVH - EVO	RVH EVO 6	RVH EVO 8
Working width	6,30 m	8,30 m
Transport width	2,48 m	2,48 m

SMOOTH STEEL Ø720 thickness 11

CORRUGATED CAMBRIDGE GD Ø600 mm - Lifetime Guarantee*

LIFETIME GUARANTEE* OR 2-YEAR GUARANTEE	CAST IRON LIFETIME GUARANTEE*		STEEL TUBE
CORRUGATED CAMBRIDGE	CAMBRIDGE	CORRUGATED	SMOOTH STEEL



NEED MORE INFORMATION ?

Our team is here to answer you !

Office

✉ contact@razol.fr ☎ (+33) 5 53 84 19 20

Head of Sales

✉ a.chadelaud@razol.fr ☎ (+33) 7 57 97 13 30

Plant Manager

✉ clayait@razol.fr ☎ (+33) 7 50 55 21 57



*excludes damage caused by wear or improper use. Frame: 5-year warranty.

The information in this document is provided for guidance only and may be changed at any time without prior notice.

