


■ Post pointer

- Conveyor is 2.10 m long and 0.55 m wide
- Adjustable make-up angle
- Adjustable discharge belt speed
- Reduced storage space
- Quick return of cylinders
- Mechanically welded construction with powder-coated finish for long service life
- Foot-operated topping-up control for right- or left-handed operation
- Number of posts/hour: 140 (*average*)
- 2 hardox knives

PICKOMAT

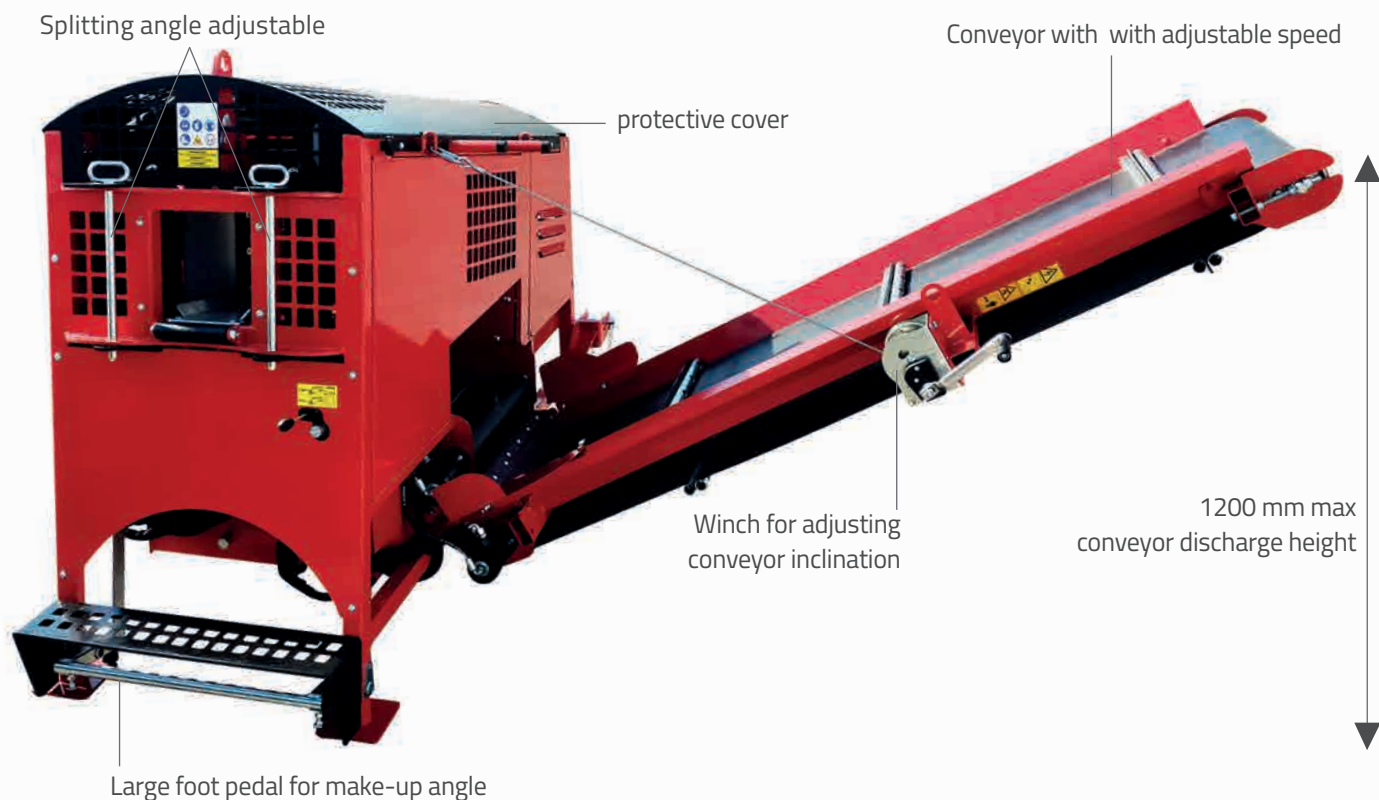

VERSION	Post pointer with PTO tractor APP00002
Splitting force (to)	12,5 (2 cylinder)
Power supply	PTO tractor
Ø max. of wood (mm)	250
Minimum length of logs (mm)	1400
Pump	2 (1x Split 1x Conveyor)
cycle time (go to / return)	9 seconds
Weight (kg)	630
 Post pointer with Elec. 400V (APP00003). CONTACT US	

