

HJ MRT® STOCK FENCE



WARRANTY
10 YEARS




PROPERTIES

This progressive stock fencing is made with strong horizontal wires and mild vertical wires. The standard finish is heavy galvanized, but there are other coating options. It is the more common solution for livestock. There are three options to choose from: Light, Medium and Heavy.



- Class A Heavy galvanized wire according to EN 10244-2 standards.
- Made according to EN 10223-5 standards.
- Horizontal wires come with crimps between each knot to add tension to the wire and assist with water run off.

Hinge joint

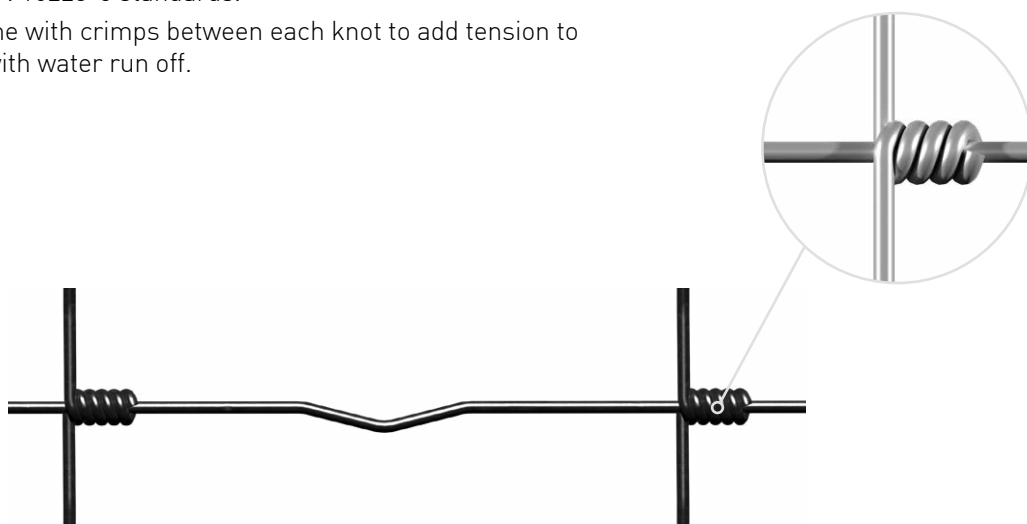

OTHER COATING OPTIONS


- Heavy galvanized + 2H ECOVER®
- Heavy galvanized + ECOVER®
- ZnAl®
- Other standards available (ASTM, SAE, BS, AS/NZS...)



HJ MRT® Light [L]


Height (mm)	Top and bottom wires		Infill horizontal wires		Vertical wires	
	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)
From 600 to 2,200	2.45	≥ 71	1.90	≥ 71	1.90	45 - 55

STANDARD DIMENSIONS

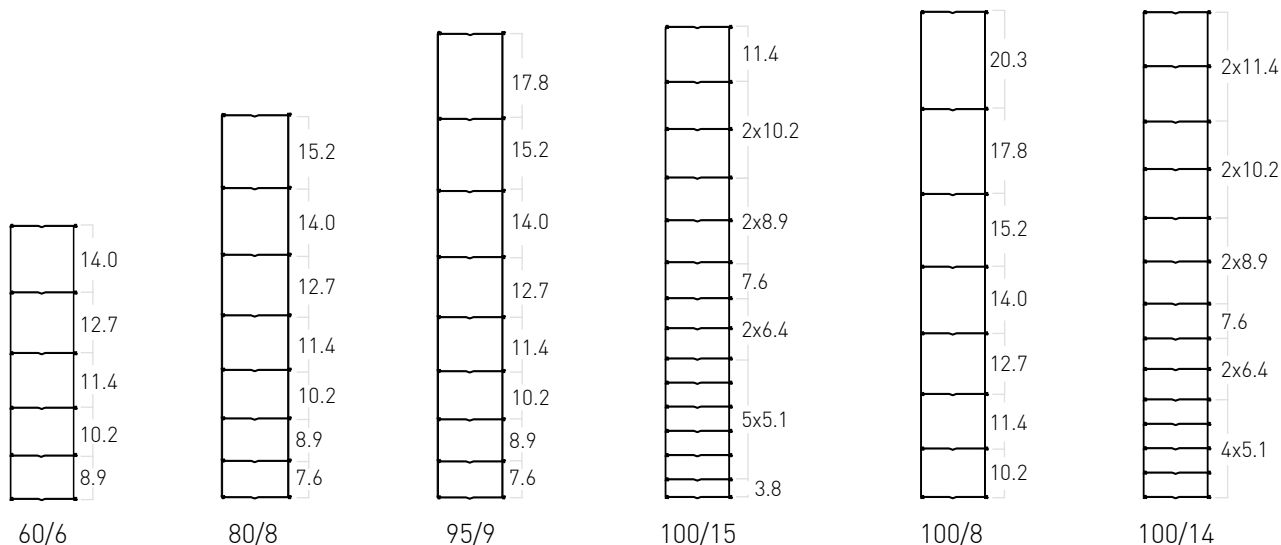

Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
60/6	60	6	15	50
80/8	80	8	15	50 100
95/9	95	9	15	50
100/15	100	15	15	50
100/8	100	8	15	50 100
100/8	100	8	30	100
100/14	100	14	15	100

Other dimensions available upon request.

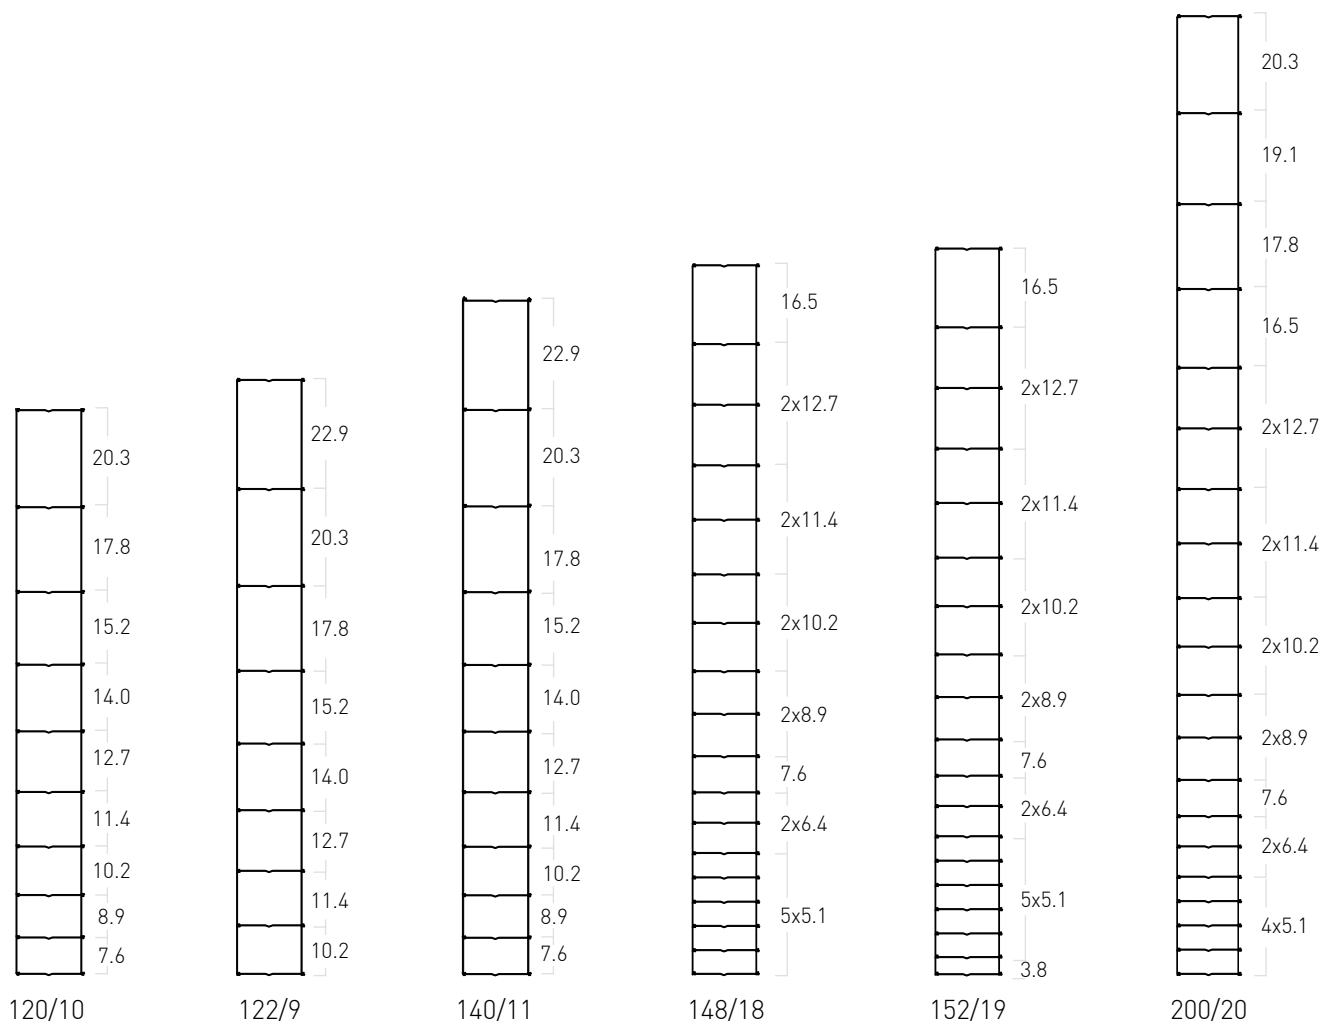


Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
120/10	120	10	15	50
122/9	122	9	15	50 100
122/9	122	9	30	100
140/11	140	11	15	50
148/18	148	18	15	50 100
148/18	148	18	30	100
200/17	200	17	15	100
200/20	200	20	15	50 100
200/20	200	20	30	100

Other dimensions available upon request.

HJ MRT® Medium [C]

Height (mm)	Top and bottom wires		Infill horizontal wires		Vertical wires	
	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)
From 600 to 2,000	3.00	≥ 71	2.45	≥ 71	2.45	45 - 55

STANDARD DIMENSIONS

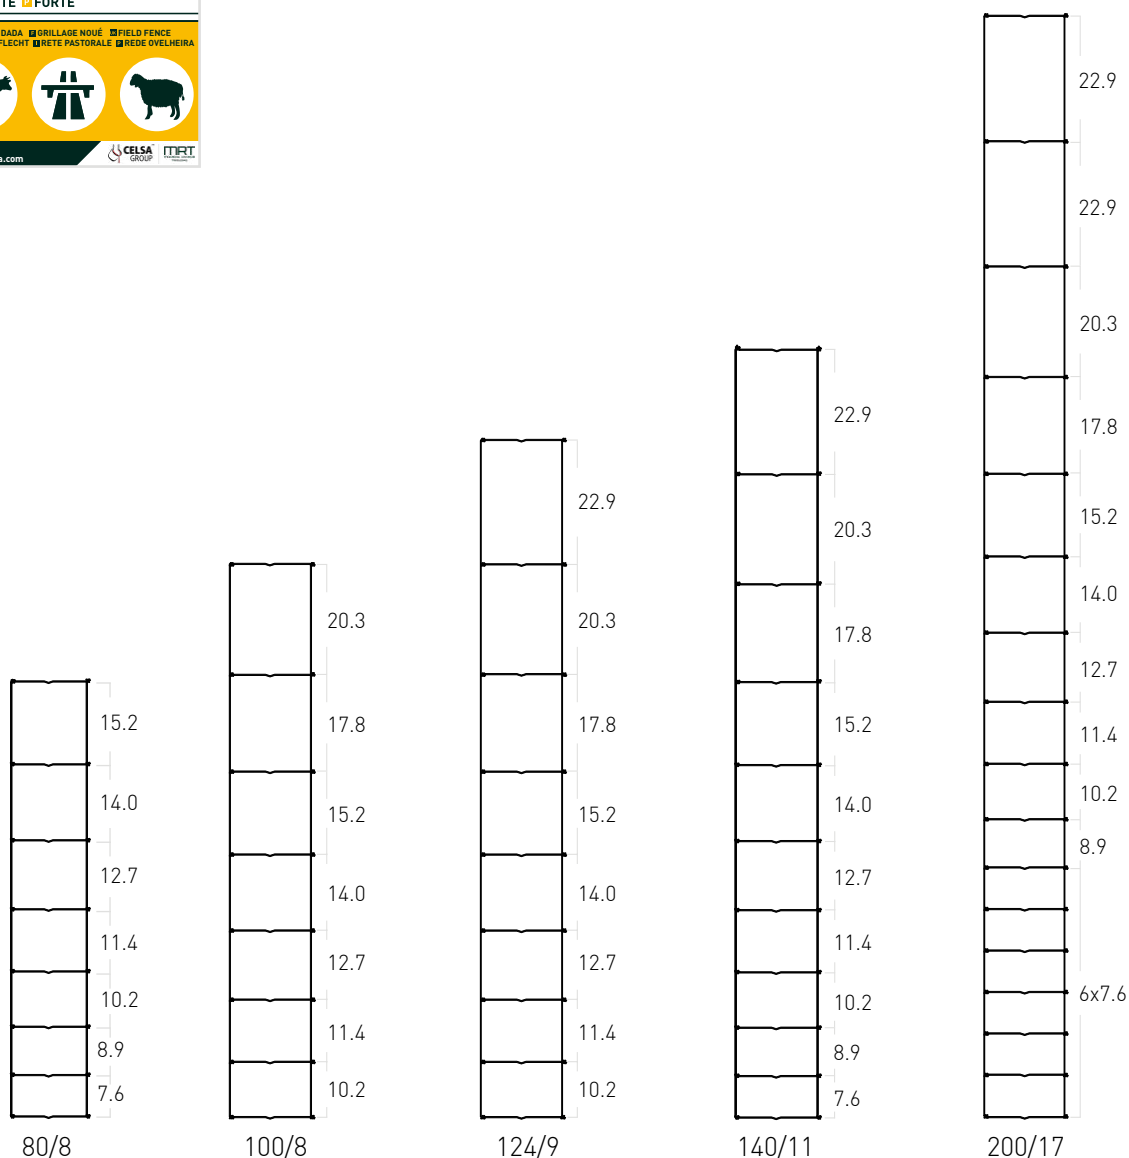


Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
80/8	80	8	15	50
100/8	100	8		
124/9	124	9		
140/11	140	11		
200/17	200	17		

Other dimensions available upon request.

HJ MRT® Heavy [B]

Height (mm)	Top and bottom wires		Infill horizontal wires		Vertical wires	
	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)	Diameter (mm)	Tensile strength (kg/mm ²)
From 800 to 1,640	4.00	≥ 71	3.00	≥ 71	3.00	45 - 55

STANDARD DIMENSIONS

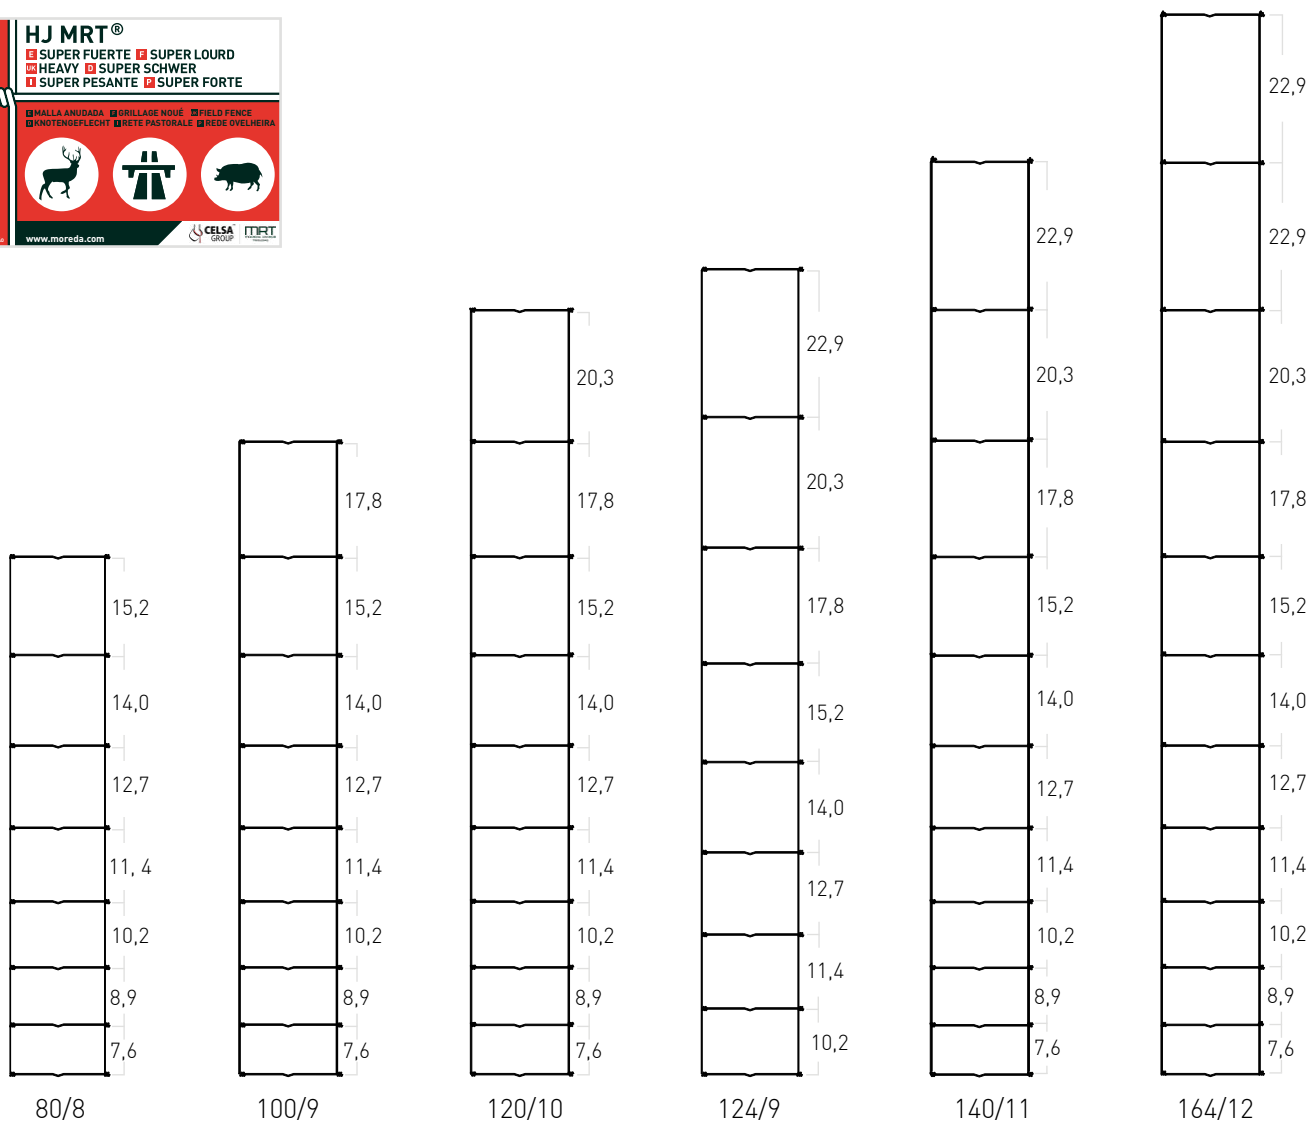

Type	Height (cm)	No. of horizontal wires	Distance between vertical wires (cm)	Roll length (m)
80/8	80	8	15	50
100/9	100	9		
120/10	120	10		
124/9	124	9		
140/11	140	11		
164/12	164	12		

Other dimensions available upon request.