



From 1977
MAKE INNOVATION IS OUR PASSION

OTHER MACHINES OF OUR PRODUCTION

VERTICAL LOG SPLITTERS:

ALPINO

6.5-8.5 ton / Splitting height 54 cm

MIGNON *ECO // PROF*

9-11 ton / Splitting height 54 cm

FARMER

FARMER
DIAVOLIK

13-15-18 ton / Splitting height: 104 cm

22-25-30 ton / Splitting height: 124 cm

FARMER *MULTIUSE*

13-18 ton / Splitting height: 104 cm

MAGIK *MULTIUSE*

16 ton / Splitting height: 115 cm



EASY LINE
family



FARMER
family



MULTI USE
family

SAW BENCHES:

KATANA *700*

Cutting depth: **max Ø 28 cm**

KATANA *750*

Cutting depth: **max Ø 30 cm**

TANDEM

Cutting depth: **max Ø 30 cm**

CUT-SPLIT-LOAD:

MAGIKA UNIVERSAL
SERIES

12 - 16 - 18 ton / Cutting **Ø 32-38 cm**
Conveyor belt: 2.50 - 4 - 5 m to be
choiced

DRUM SAW MACHINE:

REVOLVER
SERIE

Exclusive "Andrea's last system"
Cutting **Ø 18 cm** with widia blade
2 loading channels + 1 for cutting



RICCA ANDREA & C. snc

12022 Busca - ITALY
Via Vecchia di Cuneo, 57

Tel. +39.0171.946709

www.thor-italy.com
vendite@thor-italy.com



From 1977
MAKE INNOVATION IS OUR PASSION



MAGIK

Mod. 13 / 18 / 20 ton



» **STOP & GO**

DIAVOLIK

Mod. 25 / 30 ton



V.PF
Fixed PTO
Pump

Kombi
Electric +
Tractor

EL
Electric
Engine

VS
Petrol
Engine



V.PF
Fixed PTO
Pump

Kombi
Electric +
Tractor



AGROITA
partner



System
LEADER
EXCLUSIVE THOR
SYSTEM

Hydraulic
Vertical Log
Splitters

TOP

LINE
family

13 ton
18 ton
20 ton



max
124 cm



min > max
5 > 90 cm



CONTROLS

System
LEADER



MAGIK

VERSIONS AVAILABLE


V.PF Fixed PTO Pump EL Electric Engine Kombi Electric + Tractor VS Petrol Engine

MODEL	MAGIK										
Splitting height / Cutter stroke	124 cm / 114 cm (adjustable)										
Hydraulic oil tank	22 lt					23 lt				38 lt	
Splitting force	13 ton					18 ton				20 ton	
ITEM No.	34.101	34.102	34.103	34.104	34.105	34.106	36.101	36.102	36.104	36.103	36.110
Power supply	V.PF 540 rpm	EL 230 Volt	EL 400 Volt	VS 3200 rpm	Kombi EL 230 V + V.PF	Kombi EL 400 V + V.PF	V.PF 540 rpm	EL 400 Volt	VS 3200 rpm	Kombi EL 400 V + V.PF	V.PF 540 rpm
Power required (HP / kW)	22 / 16	3 / 2.2	5.5 / 4	9 / 6.7	3 / 2.2 22 / 16	5.5 / 4 22 / 16	24 / 18	7.5 / 5.5	13 / 9.55	7.5 / 5.5 24 / 18	27 / 20
1 st cutting speed (cm/sec)	9	7	6	8	7 - 6	6 - 6	7	6.6	6	6.6 - 7	7
2 nd cutting speed (cm/sec)	28	22	19	25	22 - 18	19 - 18	16	15	14	15 - 16	16
Return speed (cm/sec)	13	10	9	11.5	10 - 8.5	9 - 8.5	13	12	11	12 - 13	13
Working dimensions (W x L / H = 295 cm)	115 x 125	115 x 100	115 x 100	115 x 130	115 x 125	1115 x 125	115 x 125	115 x 120	115 x 130	115 x 125	115 x 125
Weight (kg)	380	368	368	388	408	408	414	450	455	465	447
Price											

Hydraulic vertical log splitters

A sure and innovative choice
...looking to the future!

With the **System-LEADER (Exclusive THOR system)** controls you can carry out the cutter approach stage and center the logs with one hand free (if you use the board you can use the pedal for the approach stage while both hands are free!). Once the log has been centered and clamped in the desired position, the two control levers are used in order to carry out the splitting operation

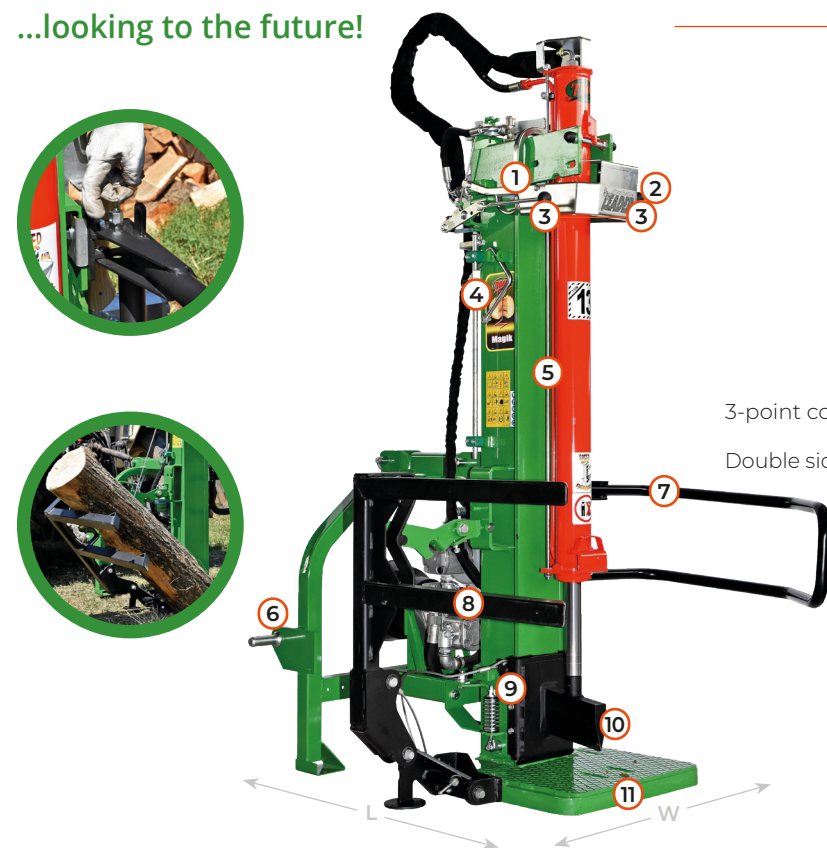

- Sensor for blocking the hydraulic flow ①
- Single control for log centering (Exclusive THOR system) ②
- Two ergonomically positioned levers activate the splitting phase ③
- Aluminium cutter stroke adjustment, easily adjustable to the desired height ④
- Retractable hydraulic cylinder for easy transport and storage. H= 190 cm ⑤
- 3-point connector 1st - 2nd cat. for V.PF and Kombi Models ⑥
- Double side protection, with lifting hook support integrated, mounted on the right side of the machine for both long and short logs ⑦
- Side hoist included mounted on the left side of the machine with dual function for fall arrest protection ⑧
- Interchangeable self-lubricating Teflon guides ⑨
- Special steel cutter with inclined cut for greater penetration and less effort ⑩
- Very wide base for ergonomic support of the log to be split ⑪



Splitter with high sturdiness and stability for industrial and agricultural use!

- Hydraulic cylinder retractable for storage. H = 215 cm ①
- OPTIONAL Manual or remote controlled winch. They can drag logs from a distance of 20 meters ②
- 12 Volt electric controls unique and with exclusive **STOPandGO!** system ③
- Electric control for the return stroke of the cutter ④
- Safety sensor and lever protector ⑤
- Tempered and high strength steel cutter, with a length of 30 cm and 6° inclined cut for a greater penetration and less effort ⑥
- Interchangeable, bolted GS400 cast iron cutter guides ⑦
- OPTIONAL Lifting hook ⑧
- Double side protection, with lifting hook support integrated, mounted on the right side of the machine for both long and short logs ⑨
- Side hoist included mounted on the left side of the machine with dual function for fall arrest protection ⑩

VERSIONS AVAILABLE

V.PF Fixed PTO Pump EL Electric Engine Kombi Electric + Tractor

25 ton
30 ton



max
123 cm



max
100 cm



CONTROLS

Stop
and GO!



DIAVOLIK

STOP
and GO!

MODEL	DIAVOLIK STOP and GO!			
Splitting height / Cutter stroke	123 cm / 113 cm			
Hydraulic oil tank	38 lt (Internal tank)		85 lt (External tank)	
Splitting force	25 ton		30 ton	
ITEM No.	46.100	46.101	46.102	46.103
Power supply	V.PF 540 rpm max.	V.PF 540 rpm max.	EL 400 Volt	Kombi EL 400V + V.PF
Power required (HP / kW)	46 / 34	50 / 37	7.5 / 5.5	7.5 / 5.5 - 50 / 37
1 st cutting speed (cm/sec)	8	8	8	8 - 8
2 nd cutting speed (cm/sec)	16.8	16.8	17.4	17.4 - 16.8
Return speed (cm/sec)	14.6	14.6	15.1	15.1 - 14.6
Rotation speed in rpm	450	450	1400	1400 - 450
3-point connector 1 st - 2 nd cat.	■	■	■	■
Working dimensions (W x L / H = 316 cm)	110 x 140	110 x 140	110 x 140	110 x 140
Weight (kg)	630	678	688	715
Price				

■ = Included as standard